WeatherStation® Multisensor – Ultrasonic Instruments for Dynamic Platforms

A Compact, Rugged Instrument for Informed Decision-Making

200WX Multisensor

From racing and cruising sailboats to yachting and commercial fishing, Airmar has WeatherStation® products specifically designed for your marine application.

The WX Series WeatherStation instruments meet a growing need for real-time, site-specific, weather information. For applications where Dynamic True and Apparent wind are important, the 200WX is recommended. It includes a 10Hz GPS, three-axis solid-state compass, rate gyro and tilt sensors. This model features configurable NMEA 0183 and NMEA 2000® digital data outputs, providing unparalleled versatility for system integration.

200WX model offers a truly best-in-class solution at a better price than any other weather monitoring system on the market today.

Applications:

- Sailing or powerboats
- Harbors and marinas
- Oil platforms

Ultrasonic Wind Measurement
Dynamic True and Apparent wind speed and direction with no moving parts

Barometric Pressure
Accurate atmospheric pressure measurement

Air Temperature
With calculated heat index and wind chill

10 Hz GPS
Position, COG,SOG, time stamping

3-Axis Accelerometer
For pitch and roll

3-Axis Compass
With dynamic stabilization and better than 1° accuracy

3-Axis Rate Gyro
For rate-of-turn data

Relative Humidity (optional)
Field serviceable RH sensor with calculated dew point

Understanding Dynamic True and Apparent Wind

Virtually all anemometers report wind speed and direction. Airmar's WeatherStation Instruments are unique because they calculate both dynamic true and apparent wind speed and direction. When the WeatherStation instrument is mounted on a moving (dynamic) platform, the apparent wind is the wind felt on your hand if you held it out while moving. Dynamic true wind Is the wind relative to North but also corrected for the speed and direction of the vessel. WeatherStation WX instruments integrate a GPS and 3-Axis compass, which allows for the calculation of the dynamic true wind speed and direction based upon the apparent wind, speed of the vehicle, and vehicle heading. Dynamic True wind measurement can be critical for any application where the platform is moving.

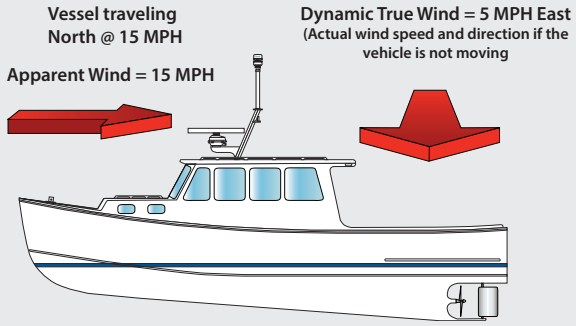

Airmar's WX Series products are the only all-in-one unit to offer dynamic true and apparent wind speeds without additional sensors.

SPECIFICATIONS

Wind Speed
- **Range:** 0 to 40 m/s (0 to 89 MPH)
- **Accuracy:** 2 knots RMS @ 20 knots
- **Resolution:** 0.1 m/s
- **Calculations:** User configurable damping

Wind Direction
- **Range:** 0° to 359.9°
- **Accuracy:** 2.5° RMS @ 20 knots
- **Resolution:** 0.1°
- **Calculations:** User configurable damping

Air Temperature
- **Range:** -40° to 80°C (-40 to 176°F)
- **Accuracy:** ±1.1°C at 20°C
- **Resolution:** 0.1°C

Relative Humidity (optional)
- **Range:** 0 to 100% RH
- **Accuracy:** ±5% RH at 0 to 90% RH at 20°C
- **Resolution:** 0.1% RH

Barometric Pressure
- **Range:** 300 to 1100 hPa
- **Accuracy:** ±1 hPa @ 25°C
- **Resolution:** 0.1 hPa

Three-axis Compass
- **Range:** 0 to 359.9°
- **Accuracy:** 1° static heading accuracy; 2° dynamic heading accuracy
- **Resolution:** 0.1°

Pitch and Roll
- **Measurement Type:** MEMS
- **Range:** 60°
- **Accuracy:** ±1° in range of ±30°
- **Resolution:** 0.1°

GPS Position Accuracy: 2.5 m (8') CEP

Operating Temperature Range: -25 to 55°C (-13 to 131°F)

Operating Voltage
- **Supply Voltage:** 9 VDC to 40 VDC
- **Supply Current (at 12 VDC):** <75 mA (<0.9 W)
- **NMEA 2000® Load Equivalency Number (LEN):** 2

Weight
- 300 grams (0.7 lb)

Mounting-thread Size, Base M39: Adapter on cable is standard 1"-14 UNS (3/4" NPT optional)

Certifications and Standards: CE, IPX6 (IPX4 with optional Relative Humidity sensor), RoHS, IEC61000-4-2, IEC60945, IEC60950_1C, IEC60950_22A, EN55022, EN55024, EN14982

COMMUNICATIONS

Hardware Interfaces: Serial RS232, Serial RS422, CAN
Data Protocols: Serial – NMEA 0183, CAN – NMEA 2000
Serial Data Transmission Code: ASCII
Serial Output Rate: 1 Hz typical. User selectable. 10 Hz max recommended

PART NUMBERS

200WX: 44-835-1-01, NMEA 0183 (RS422) and NMEA2000® (CAN Bus)
200WX: 44-837-1-01, RH, NMEA 0183 (RS422) and NMEA2000® (CAN Bus)
200WX: 44-846-1-01, NMEA 0183 (RS232) and NMEA2000® (CAN Bus)
200WX: 44-847-1-01, RH, NMEA 0183 (RS232) and NMEA2000® (CAN Bus)

Cables sold separately unless otherwise specified
RH = Relative Humidity

DIMENSIONS

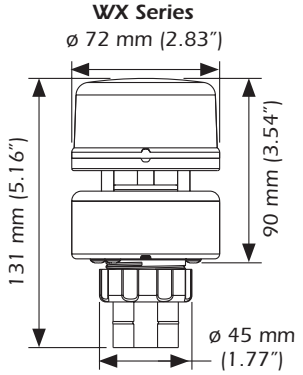

©2025 AIRMAR Technology Corporation 200WX_Marine_rG 09/04/25
As AIRMAR constantly improves its products, all specifications are subject to change without notice. All AIRMAR products are designed to provide high levels of accuracy and reliability, however they should only be used as aids to navigation and not as a replacement for traditional navigation aids and techniques. WeatherStation® is a registered trademark of AIRMAR Technology Corporation. AMPHENOL is a registered trademark of Amphenol Corporation. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with AIRMAR.

AIRMAR® TECHNOLOGY CORPORATION
An Amphenol Company